



ESTORES DECORATIVOS

**POLYSCREE**











Catálogo de Produtos














# POLYSCREEN

## DESIGNER COLLECTION

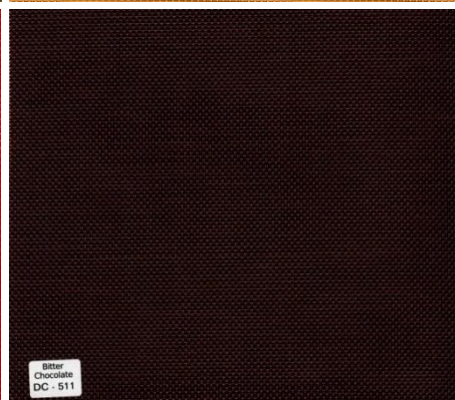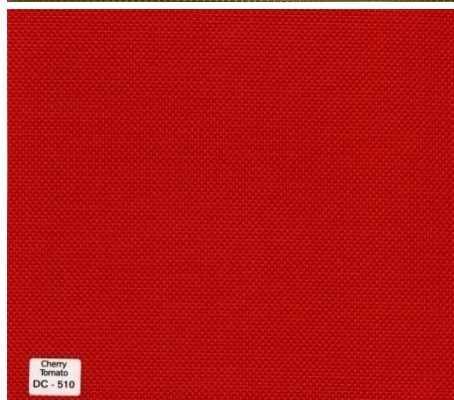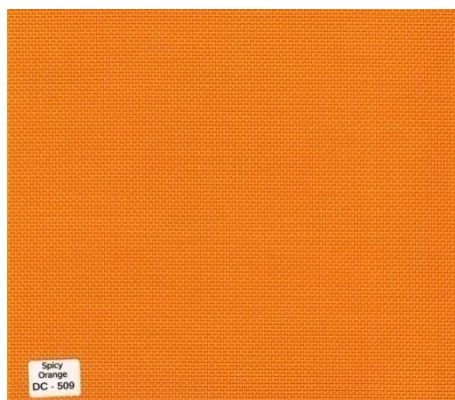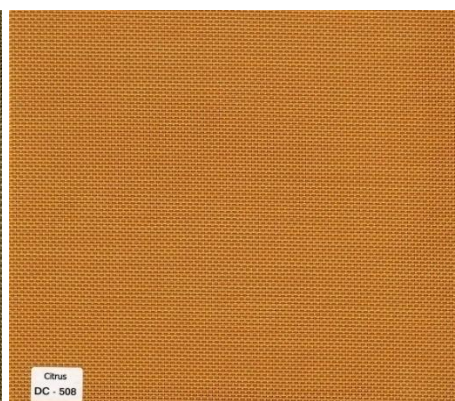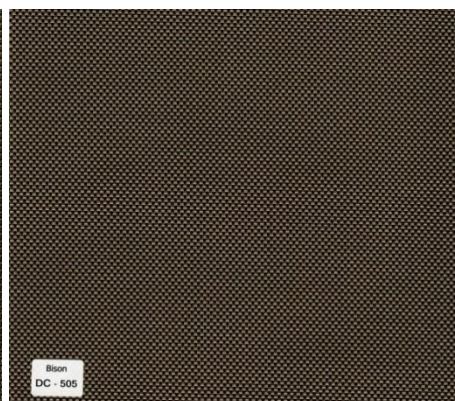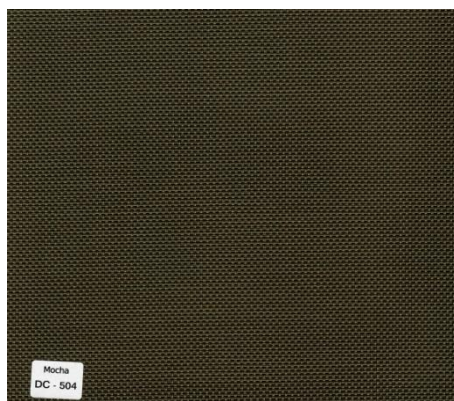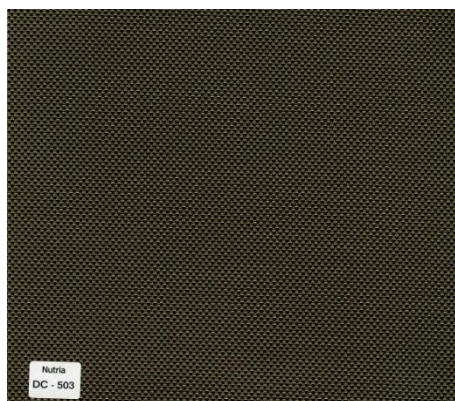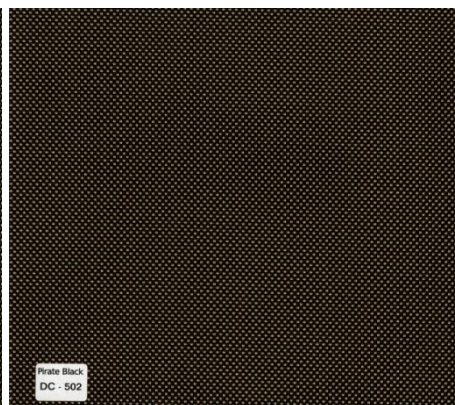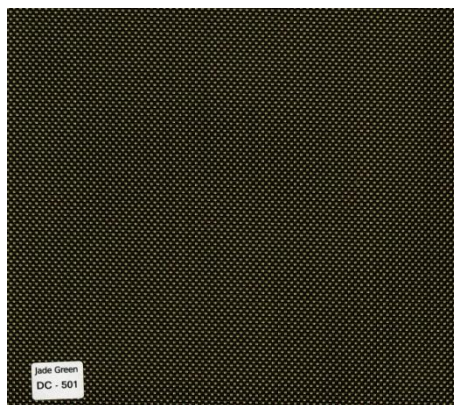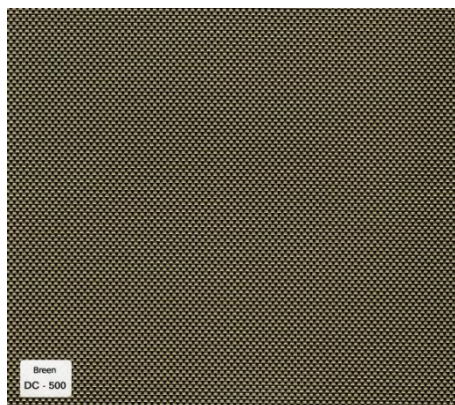

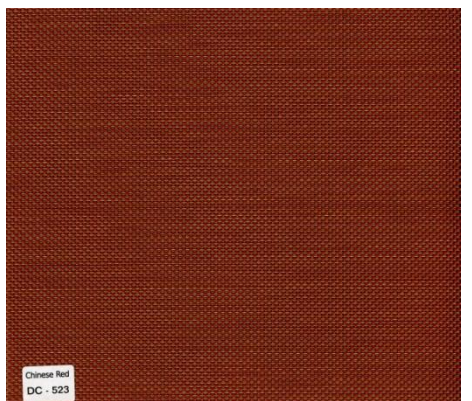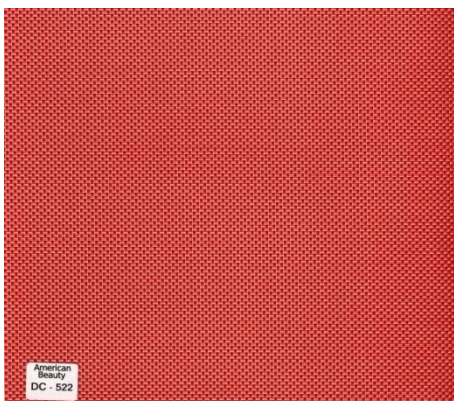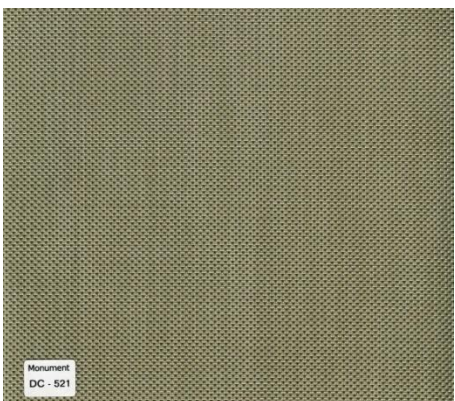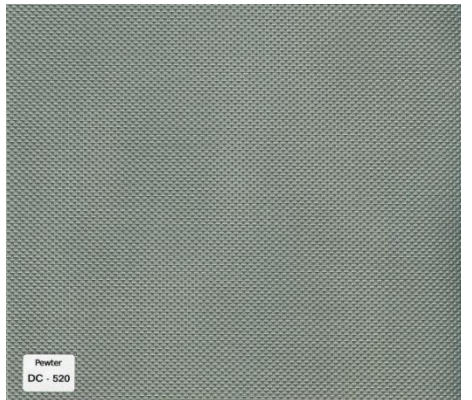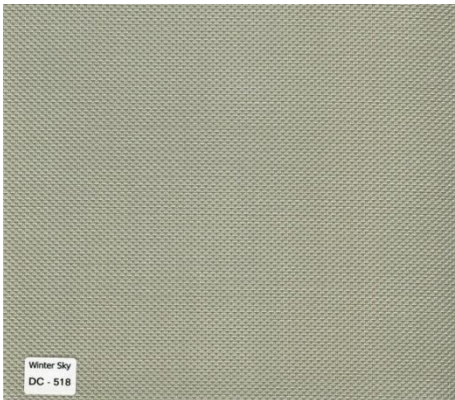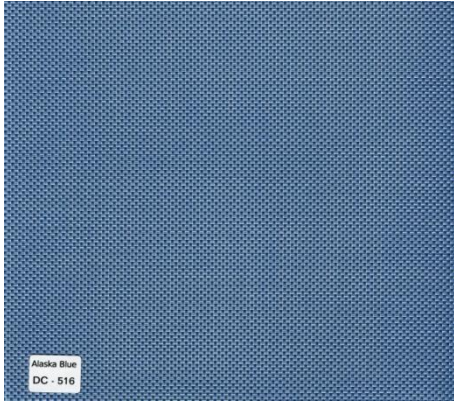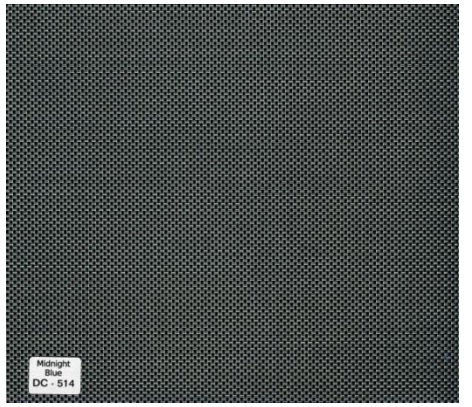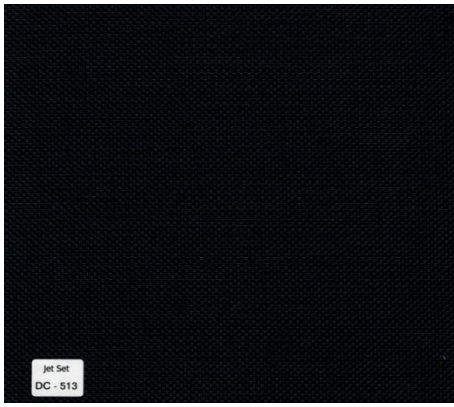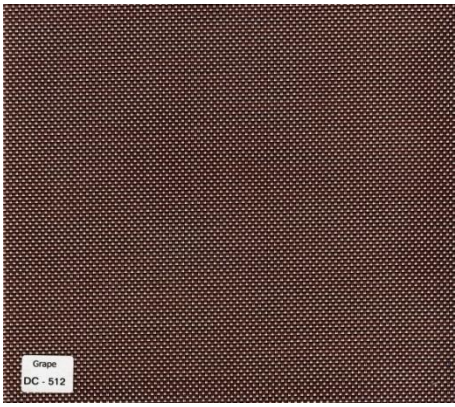

# POLYSCREEN

## OPTICAL AND SOLAR FEATURES

Colour	Sun Protection Properties				Shadow coefficient		Solar factor*	
	Ts	Rs	As	Tv	C/4mm	C/6mm	C/4mm	C/6mm
Solar factor*								
<b>Peppercron</b>	32	21	47	30	0.69	0.66	0.58	0.54
<b>Chinese Red</b>	12	15	73	13	0.67	0.64	0.57	0.53
<b>American Beauty</b>	20	24	56	21	0.68	0.64	0.57	0.52
<b>Monument</b>	26	21	53	26	0.69	0.66	0.58	0.54
<b>Pewter</b>	18	28	58	19	0.68	0.64	0.57	0.52
<b>Mirage</b>	15	18	67	15	0.70	0.67	0.59	0.55
<b>Winter Sky</b>	23	29	48	24	0.64	0.62	0.53	0.49
<b>Paloma</b>	32	37	31	30	0.60	0.57	0.50	0.47
<b>Alaska Blue</b>	20	21	59	20	0.68	0.64	0.57	0.52
<b>Blue Indigo</b>	10	9	81	11	0.78	0.75	0.66	0.62
<b>Midnight Blue</b>	21	14	65	22	0.70	0.67	0.59	0.55
<b>Jet Set</b>	9	5	86	9	0.78	0.76	0.66	0.62
<b>Grape</b>	19	16	65	21	0.70	0.67	0.59	0.55
<b>Bitter Chocolate</b>	10	7	83	9	0.77	0.74	0.65	0.61
<b>Cherry Tomato</b>	8	22	70	10	0.66	0.63	0.55	0.51
<b>Spicy Orange</b>	12	27	61	11	0.66	0.63	0.55	0.51
<b>Citrus</b>	13	29	58	12	0.66	0.63	0.55	0.51
<b>Cappuccino</b>	12	18	70	11	0.74	0.71	0.62	0.58
<b>Monk's Robe</b>	9	15	76	8	0.76	0.73	0.64	0.60
<b>Bison</b>	11	13	76	11	0.77	0.75	0.65	0.61
<b>Mocha</b>	12	12	76	11	0.76	0.73	0.64	0.60
<b>Nutria</b>	9	11	80	8	0.77	0.74	0.65	0.61
<b>Pirate Black</b>	10	9	81	13	0.71	0.67	0.62	0.58
<b>Jade Green</b>	10	9	81	13	0.71	0.67	0.62	0.58
<b>Breen</b>	10	19	71	9	0.68	0.65	0.56	0.53

\*Solar factor of reference glazing: Single 4mm Clear Glass: 0.84. Single 6mm Clear Glass: 0.82. Heat Absorbing Glass: 0.57

Samples tested in accordance to ASHREA Standard 701988

# POLYSCREEN

## BASIC FEATURES

Technical Specifications	Standard	
Composition		12% PES+88% PVC
Weight(gm2)	UNE EN 12127	555± 5%
Yam/cm	Internal method	555± 5%
Yam diameter	Internal method	04
Openess Factor (%)	ASHRAE Standard 74-1988	
UV blockage	-	Approximately 95%
Thickness (mm)	Internal method	0.69± 5%
Light fatness (grey scale level)	UNE EN ISO 105 B06-2002 (interior)	5/5
	UNE EN ISO 105 B03-1994 (exterior)	4/5 white
	UNE EN ISO 105 B04-1998 (exterior)	
	UNE EN ISO 492-2 (exterior)	
Light fatness (blue scale level)	UNE ISO 105 B02-2002 (interior)	8/8
Tearing resistance (daN)		7/8 white
Tearing resistance (daN)	UNE EN ISO 13937-3; 2001	Warp: 5.4 Weft: 6.4
Breaking strength (daN5cm)	UNE EN ISO 105 b02-2002	Warp:110.3 Weft:100.9
Stretch (%)	UNE EN ISO 13934-1:1999	Warp:23.2 Weft: 20.0
Air permeability	UNE EN ISO 9237:1996	2128MMS
Aorrosion in ambience of saline neutral fog	UNE EN ISO 112-017:92 ISO 9227:90	Without changes in surfaces
Odour test	PV-3900	3 Pass
Fire classification	UNE EN 13773:2003	CLASS 1
	NF P 92-503	M1
	BS 5867:2:80	Type B
	DIN 4102	B2
	NFPA 701	Pass



## **MOTORES FERA**

Comércio e Venda de Estores e Automatismos, Lda.

### **Morada**

Rua do Negral, 985  
4440-115 Campo – Valongo  
Portugal

**Telf.** 224152395/6

**Fax.** 224152397

**E-mail** - [motoresfera@sapo.pt](mailto:motoresfera@sapo.pt)

**Site** – [www.motoresfera.pt](http://www.motoresfera.pt)

**GPS:** 41° 10' 41. 21" N 8° 26' 42, 53" 0